


## How to Measure for Control Cable Installation

For New Installation: Measure A +B distance from the control along an unobstructed cable routing to clutch and / or throttle connection. Round this dimension off to the next whole foot: you will have your cable length. We recommend that the cable bends have a minimum radius of about 8" (200mm). For Outboard engine installation, it is necessary to add three feet to the obtained length, in order to allow the engine movement.

To determine the needed length of the replacement cable, measure it from tip to tip. When ordering, specify the cable length in feet, rounding the dimension off to the next whole value. If any kit is required to complete the cable connection, consult the appropriate section in this catalog.

### Outboard

$$A + B + 3'' (90 \text{ CM}) = L$$

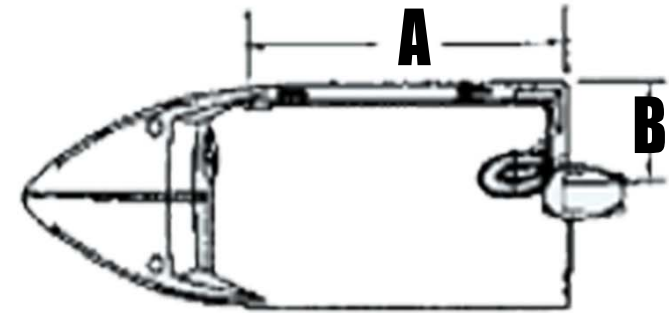

### Inboard / Sterndrive

$$A + B = L$$

